RoHS Compliant | Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

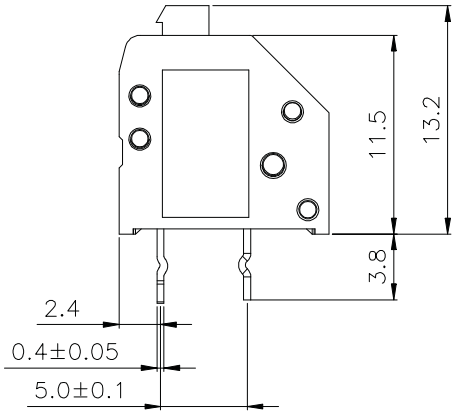

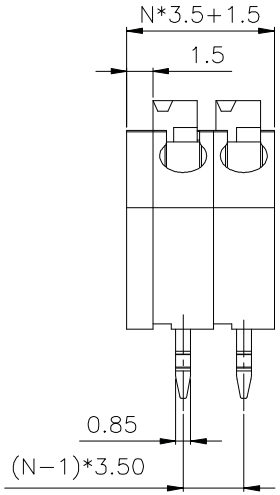

N=Number of contacts

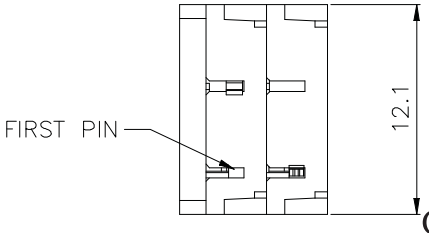



N=No.of contacts

- MATERIAL
  PIN HEADER: BRASS, TIN PLATED
  HOUSING: PA66, UL94V−0
- ELECTRICAL
  RATED VOLTAGD : 250V
  RATED CURRENT : 8A
  CONTACT RESISTANCE : 20mΩ
  INSULATION RESISTANCE : 5000MΩ/1000V
  WITHSTANDING VOLTAGE : AC1500V/1Min
  WIRE RANGE : 22−16AWG 1.5mm²
- MECHANICAL
  TEMP.RANGE : −40℃∽+105℃
  MAX SOLDREING : +250℃, FOR 5 SEC.
  STRUO LEBGTG : 8−9mm

订购方式/HOW TO ORDER

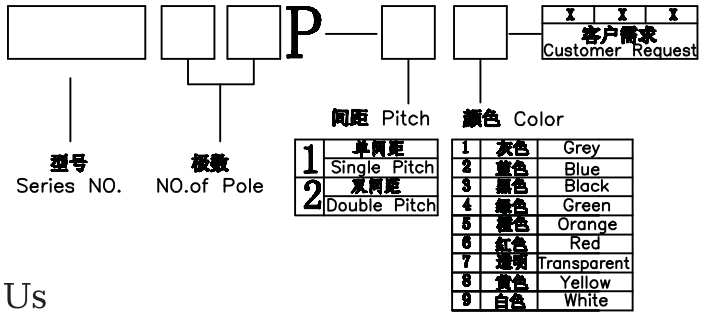

Contact Us

TEL:+86−574−63510149 FAX:+86−574−63516735
E-Mail:Sales@cxsuteng.com Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 DATE		2012.07.10	

慈溪市速腾电子有限公司
SUTOWN CIXI SUTENG ELECTRONIC CO., LTD

单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST250A—3.5
角法 VIEW		设计 DESIGN	No.06		
比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	ST250A—3.5
版本 VER	A0	核准 APPD		图号 DRAW NO.	ST250A—3.5